

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

EUROPEAN PATENT APPLICATION

Application number: 79104090.0

Int. Cl.³: **F 16 G 11/10**

Date of filing: 22.10.79

Priority: 28.10.78 IT 8363378

Applicant: **PAL DI DONA' ALESSANDRO & C. S.N.C.**, Via delle Orchidee, I-20020 Vanzagheto (Milano) (IT)

Date of publication of application: 06.08.80
Bulletin 80/16


Inventor: **Dona, Alessandro**, Via Delle Orchidee, I-20020 Vanzagheto (Milano) (IT)

Designated Contracting States: **BE CH DE FR GB LU NL SE**

Representative: **Sessi, Romano**, Viale Belforte 89, I-21100 Varese (IT)

Self-fastening device for ropes, cords, cables and the like.

A self-fastening device for fastening ropes, cords, cable and the like, particularly for fastening tensile stressed ropes, cords, cables and the like, comprising at least a terminal (12), a body (1) with seats (2 and 4) for a fastening member (6), a spring (3) and a cord (11), wherein the self-fastening member (3) is shaped like a ball and is idly and loosely pivoted on a shank (8) of a reel shaped member (80) which is slidably mounted in a pair of slots (9) and projects outside with a pair of operable flanges (8a and 8b), the ball and shank size being such that in operation rolling friction conditions between self-fastening member (6) and its seat 2 are determined.

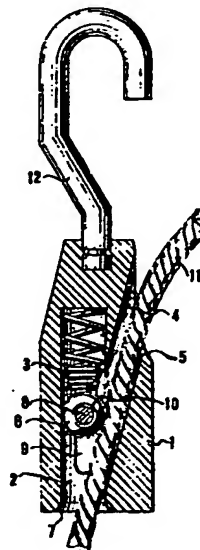

- 1 -

Self-fastening device for ropes, cords, cables and the like

It is an object of the present invention a self-
5 fastening device for ropes, cords, cables, and the
like, particularly for fastening tensile stressed
ropes, cords, cables and the like.

At the present status of the art a number of self-
10 fastening devices for ropes, cords, cables and the like
are known for several uses and which have one or more
drawbacks. All of them comprise a connector member
or cord terminal, and a body housing a spring, a fast-
ening means and a receiving seat for rope, cord, cable
15 or the like which provides an acute angle with the self
fastening means shifting seat.

Known devices may be substantially arranged in two
classes. A first class comprises all those devices
20 in which the self-fastening member operates inside the
housing body and has no outer seizable projections to
drive the same and to disengage and therefore to re-
lease the rope, cord, cable or the like. In a second
class may be classified those devices wherein the self

fastening member is cylindrical and is provided with outer projections which are operable to release the rope, cord, cable or the like.

- 5 From the point of view of the effectiveness of the device the former were better due to the fact that the self-fastening member could be formed as a spherical or as a swelled or arcuate in two directions body. The latter were less advantageous than the former as it was thought
10 that the outer projection of the self-fastening member could be provided only together with a cylindrical shape.

- From a constructive point of view in both classes but
15 over all in the latter difficulties were found to provide spring self-fastening member units particularly effective and cheap.

- The aim of the present invention is to eliminate the
20 aforesaid disadvantages and to offer, furthermore various advantages.

- The inventor, has conceived a self-fastening unit substantially formed as a sphere which is idly pivoted on
25 the shank of a reel shaped member whose flanges project outside to provide releasing members for the self-fastening member. On the other side the spherical shape of the self-fastening member provides a spontaneous matching between the spherical surface of same self-
30 fastening member and the spring end which according to a preferred embodiment of the present invention is a truncate-conical spring end.

The present invention will hereinafter be further described by way of example with reference to the accompanying drawings in which: -

5 Figure 1 is an axial vertical longitudinal cross-section view of a device according to the present invention in operation.

Figure 2 is an axial horizontal longitudinal cross-section view of device as shown in figure 1.

Referring now to the drawing figures there is shown a self-fastening device for ropes, cords, cables and the like, particularly for fastening tensile stressed ropes, cords, cables and the like comprising conventionally a terminal preferably in the form of an hook 12, a substantially solid body having a seat for receiving self-fastening member 80 and a passage for receiving therethrough a rope, cord, cable or the like and forming an acute angle with the seat 2 for receiving the self-fastening member, a self-fastening member 80 and a spring 3. The self-fastening member 80 is longitudinally movably mounted in a pair of slots 9 and projects out from body 1 with a pair of ring units 8a and 8b. Conventionally, a rope, cord, cable or the like is slipped through from the end mouth opposed to the hook 12 after having urged the self-fastening member 80 in opposition to the force of spring 3.

30 This is obtained by driving on projecting ends 8a and 8b. Releasing the self-fastening member i.e. releasing

spring 3, the self-fastening member 80 engages ropes, cord, cables or the like 11 fastening them to the body 1: the more the rope is drawn the hardest it becomes fastened.

5

According to the present invention the self-fastening member 80 is substantially shaped like a ball 6 and is loosey and idly mounted on shaft 8 of member 80.

Spherical member 6 is sized both relatively to the
10 bore 2 and shaft 8 diameter so that when the spherical member 6 is radially urged by rope 11 against opposite side of base 2 it is not impeded by shaft 8. In this way a condition of rolling friction between spherical member 6 and base 2 is provided. According to a preferred
15 embodiment of the invention the throat inlet 7 and outlet 5 are bevelled.

Patent claims

1. A self-fastening device for fastening ropes, cords,
cable and the like, particularly for fastening tensile
5 stressed ropes, cords, cables and the like, comprising
at least a terminal (12), a body (1) with seats (2 and
4) for a fastening member (6), a spring (3) and a cord
(11), wherein the self-fastening member (3) is shaped
like a ball and is idly and loosely pivoted on a shank
10 (8) of a reel shaped member (80) which is slidably
mounted in a pair of slots (9) and projects outside with
a pair of operable flanges (8a and 8b), the ball and
shank size being such that in operation rolling friction
conditions between self-fastening member (6) and its
15 seat 2 are determined.

2. Self-fastening device, as claimed in claim 1,
characterized in that the spring (3) at least at the end
engaging the ball (6) is shaped like a truncate cone
and its terminal turns adjacent to the ball-like self
20 fastening member (6) are closed i.e. provide a strenght
neck.

3. Self-fastening device as claimed in claims 1 and 2,
characterized in that the body (1) of device is widely
25 bevelled at the passage inlet (7) and outlet (5) for the
rope, cord, cable or the like (11).

1/1

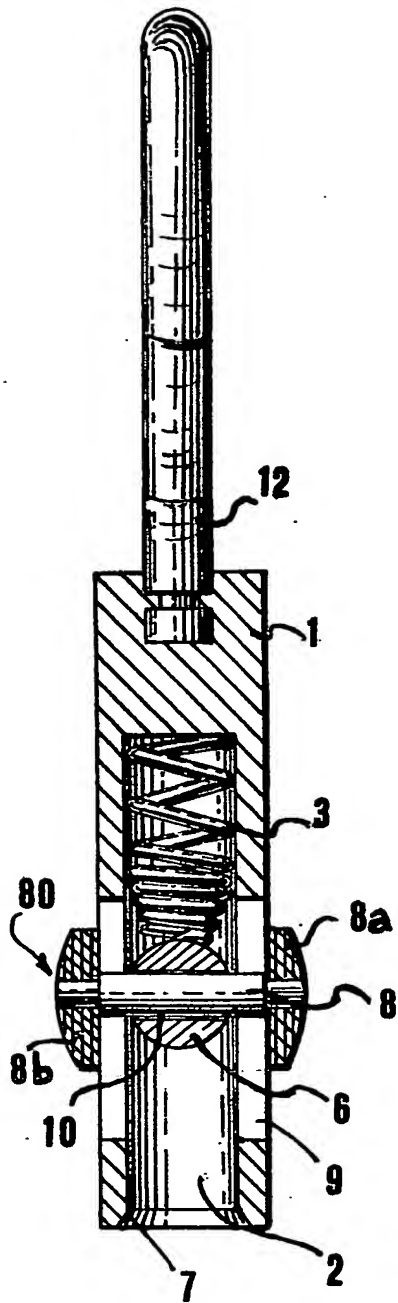


FIG. 2

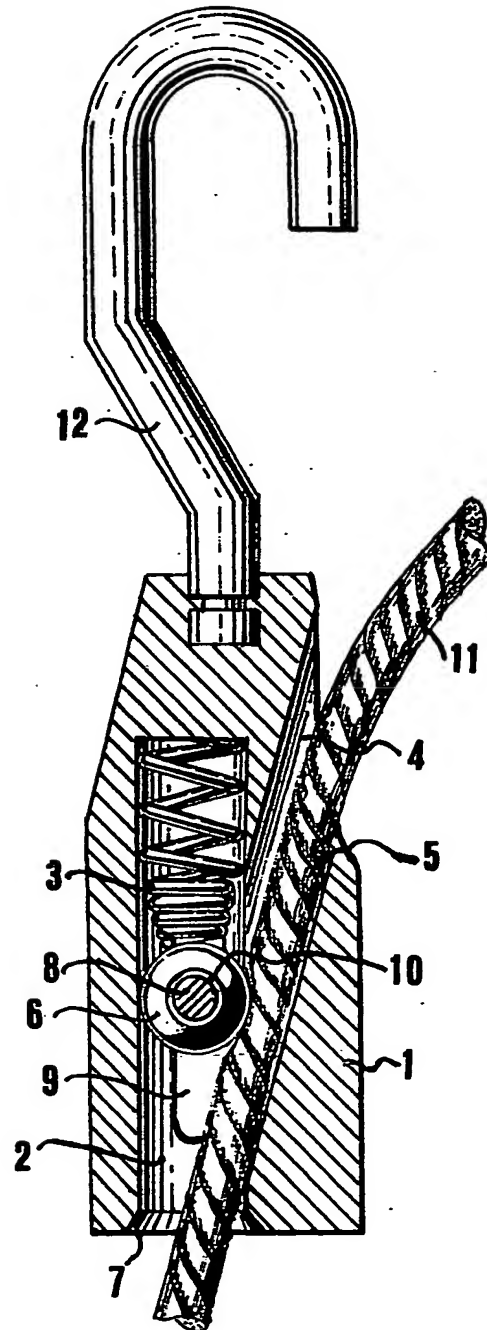


FIG. 1



European Patent
Office

EUROPEAN SEARCH REPORT

0013693
Application number

EP 79 10 4090

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
	<u>CH - A - 469 918 (ANZINI)</u> * Figures 1,2; column 1, line 33 - column 2, line 42 * --	1-3	F 16 G 11/10
	<u>US - A - 3 827 674 (PASBRIG)</u> * Figure 17, column 6, lines 10-15, 56-64; figures 24,25, column 7, lines 16-21, 32-37 * --	1,2	
A	<u>FR - A - 2 076 703 (LAINE)</u> * Figures 8,9; page 7, line 22 - page 8, line 8 * --		TECHNICAL FIELDS SEARCHED (Int. Cl. 3)
A	<u>US - A - 3 551 883 (PASBRIG)</u> * Figures 3,4; column 2, line 59 - column 3, line 25 * ----		F 16 G B 66 C B 66 D H 01 R F 16 B
			CATEGORY OF CITED DOCUMENTS
			X: particularly relevant A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: conflicting application D: document cited in the application L: citation for other reasons
			&: member of the same patent family, corresponding document
<input checked="" type="checkbox"/> The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
The Hague	10-01-1980	JAIK	